

## VTL Task Light



**Application:** The Vyv VTL Task Light is a premium grade, under cabinet task light. For use with indoor applications where low glare illumination and ease of installation are required. This luminaire's shallow design with its standard cord plug set makes it ideal for use as task lighting for various applications.

**Mode:** Use 'Antimicrobial+Light Mode' when both continuous antimicrobial action and illumination are needed. See installation instructions (INS-464) for wiring details.

## Product Specifications

**Housing:** Die-formed, code gauge steel. One-piece folded construction. Spot welded for rigidity and clean appearance. Standard 10' three wire cord and plug set. Center exit is standard.

**Mounting:** Key holes provided for easy mounting. Flush mounting surface contains no offsets or exposed fastener heads.

**Lens:** Standard diffuser is a clear prismatic pattern #12 acrylic lens, designed for high efficiency and low-glare illumination.

**Finish:** Antimicrobial gloss white polyester powder coat finish with a 5-stage pretreatment or textured, sandtex black, polyester powder painted. High reflectivity coated reflecting surfaces for improved efficiency.

**Electrical:** Long life LEDs coupled with high efficiency drivers, provide quality illumination.

**LED:** Patented Vyv LED package. The range of CCT (correlated color temperature) follows the color uniformity guidelines of the American National Standard regarding specifications for the chromaticity of solid-state lighting (SSL) products as per ANSI C78.377-2017.

**Approvals:** Approved to UL standards. EPA Est. 94831-CAN-1. Covered by one or more of the following U.S. Patent Numbers: 9,333,274; 9,439,989; 9,713,223; 9,927,097; 10,357,582; 10,753,575



## Ordering

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Luminaire Type: \_\_\_\_\_ Approved By: \_\_\_\_\_  
 Product Code: \_\_\_\_\_

Series	Size	CRI	CCT	Lumens	Voltage	Features	Finish
VTL		80			UNV	W	
	24 24"	80 80 CRI	30 3000K	24"	UNV 120-277V	W Antimicrobial +Light Mode	ABF Gloss White Antimicrobial
	48 48"		35 3500K	017 1,700lm			
			40 4000K	48"			
				032 3,200lm			BLK Black

Options	
<b>Wiring</b>	
V00	No Cord - Hard Wire
V02	Convenience Outlet
V77	PIR Integral Occupancy Sensor (Not available with Rocker Switch)

## Dimensions


LENGTH	SIZE		
	A	B	C
24	24"	7"	1.75"
48	48"	7"	1.75"

## Performance

Length	24"	48"
Lumens	1,700	3,200
CRI	80	80
Watts	25.6	47.6

## Electrical

Input Frequency	50/60Hz
Power Factor	>.9

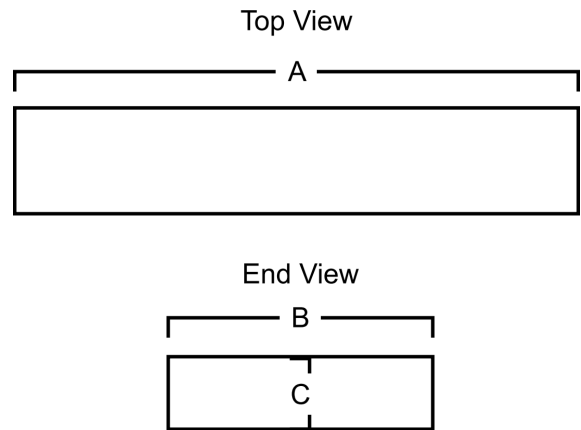

Vyv will work with your facility to customize a design for lighting and antimicrobial action. Vyv, Inc. reserves the right to upgrade and improve products without notice.

**SPECIFICATIONS AND DATA SUBJECT TO CHANGE WITHOUT NOTICE**

Updated January 24, 2024